

# Vector™ VR1000 GNSS Position & Heading Receiver

## GNSS Compass for Machine Control Systems

### key features

- Athena™ RTK Engine
- Extremely accurate heading with baselines up to 10 m
- Multi-frequency GPS/GLONASS/BeiDou/Galileo/QZSS/IRNSS/Atlas® GNSS Global Correction Service
- Integrated Ethernet, CAN, internal 400MHz radio, Serial, Bluetooth, and Wi-Fi
- Powerful WebUI accessed via Wi-Fi plus 12 multi-color LEDs
- Integrated IMU delivers fast start-up times and maintains heading during temporary GNSS outage
- Fully rugged IP69K, and MIL-STD810G compliant solution for the harshest environments



The Vector VR1000 is Hemisphere GNSS' premiere multi-GNSS, multi-frequency position and heading receiver designed specifically for the machine control market. Providing precise heading, Athena RTK positioning, and full Atlas capability, its rugged design is compliant to IP69K, MIL-STD810G, and IEC 60068-2 standards.

The VR1000 supports antenna separations up to 10 meters, offering heading accuracy to 0.01 degrees RMS in addition to RTK position accuracy and full support for Hemisphere GNSS' Atlas Global Correction Service.



precision@hgns.com  
www.hgns.com

# Vector VR1000 GNSS Position & Heading Receiver

## GNSS Receiver Specifications

Receiver Type: GNSS Position & Heading RTK Receiver  
Signals Received: GPS, GLONASS, BeiDou, Galileo, QZSS, IRNSS and Atlas 1059  
Channels: 1059  
GPS Sensitivity: -142 dBm  
SBAS Tracking: 3-channel, parallel tracking  
Update Rate: 10 Hz standard, 20 Hz optional  
Timing (1PPS): 20 ns  
Accuracy: 100°/s maximum  
Rate of Turn: 40 s (no almanac or RTC)  
Cold Start: 20 s typical (almanac and RTC)  
Warm Start: 5 s typical (almanac, RTC and position)  
Hot Start: 10 s typical (Hot Start)  
Heading Fix: 10 s typical (Hot Start)  
Antenna Input Impedance: 50  $\Omega$   
Maximum Speed: 1,850 mph (999 kts)  
Maximum Altitude: 18,288 m (60,000 ft)  
Differential Options: SBAS, Atlas (L-band), RTK

## Accuracy

Positioning:	Horizontal (95%)	Vertical (95%)
Autonomous, no SA: <sup>2</sup>	1.2 m	2.5 m
SBAS (WAAS): <sup>2</sup>	0.25 m	0.5 m
Atlas (L-band): <sup>2,3</sup>	0.04 m	0.08 m
RTK: <sup>1</sup>	10 mm + 1 ppm	20 mm + 2 ppm
Heading (RMS):	< 0.2° @ 0.5 m antenna separation < 0.1° @ 1.0 m antenna separation < 0.05° @ 2.0 m antenna separation < 0.02° @ 5.0 m antenna separation < 0.01° @ 10.0 m antenna separation	
Pitch/Roll (RMS):	1°	
Heave (RMS):	30 cm (DGPS) <sup>3</sup> , 10 cm (RTK) <sup>3</sup>	

## L-Band Receiver Specifications

Receiver Type: Single Channel  
Channels: 1530 to 1560 MHz  
Sensitivity: -140 dBm  
Channel Spacing: 5 kHz  
Satellite Selection: Manual or Automatic  
Reacquisition Time: 15 sec (typical)

## Communications

Ports: 1x full-duplex RS-232/RS-422, 1x full-duplex RS232, 2x CAN, 1x Ethernet 4800 - 115200  
Baud Rates: 4800 - 115200  
Radio Interfaces: Bluetooth 2.0 (Class 2), Wi-Fi 2.4 GHz, UHF (400 MHz)  
Correction I/O Protocol: Atlas, Hemisphere GNSS proprietary, RTCM v2.3 (DGPS), RTCM v3 (RTK), CMR, CMR+  
Data I/O Protocol: NMEA 0183, Hemisphere GNSS binary  
Timing Output: 1PPS, CMOS, active high, rising edge sync, 10 k $\Omega$ , 10 pF load  
Event Marker Input: CMOS, active low, falling edge sync, 10 k $\Omega$ , 10 pF load

## Power

Input Voltage: 9-36 VDC  
Power Consumption: 10.8W Maximum (All signals and L-band)  
Current Consumption: 1.2A Maximum  
Power Isolation: No  
Reverse Polarity Protection: Yes

## Environmental

Operating Temperature: -40°C to +70°C (-40°F to +158°F)  
Storage Temperature: -40°C to +85°C (-40°F to +185°F)  
Humidity: 95% non-condensing  
Mechanical Shock: 50G, 11ms half sine pulse (MIL-STD-810G w/ Change 1 Method 516.7 Procedure 1)  
Vibration: 7.7Grms (MIL-STD-810G w/Change 1 Method 514.7 Category 24)  
EMC: CE (ISO14982/EN13309/ISO13766/IEC60945), Radio Equipment Directive 2014/53/EU, E-Mark, RCM IP69K

## Mechanical

Dimensions: No mounting Plate 23.2 L x 16.5 W x 7.9 H (cm)  
9.1 L x 6.5 W x 3.1 H (in)  
With Mounting Plate 23.2 L x 21.4 W x 8.3 H (cm)  
9.1 L x 8.4 W x 3.3 H (in)  
Status Indications (LED): Power, Primary Antenna, Secondary Antenna, Heading, Quality, Atlas, Bluetooth, Wi-Fi, CAN1, CAN2, Ethernet, Radio  
Power/Data Connector: 23-pin multi-purpose

## Aiding Devices

Gyro: Provides smooth heading, fast heading reacquisition and reliable < 0.5° per min heading for periods up to 3 min. when loss of GNSS has occurred <sup>4</sup>  
Tilt Sensors: Provide pitch/roll data and assist in fast start-up and reacquisition of heading solution

<sup>1</sup> Depends on multipath environment, number of satellites in view, satellite geometry, no SA, and ionospheric activity


<sup>2</sup> Depends on multipath environment, number of satellites in view, WAAS coverage and satellite geometry

<sup>3</sup> Requires a subscription

<sup>4</sup> Depends on multipath environment, number of satellites in view, satellite geometry, baseline length (for differential services), and ionospheric activity

<sup>5</sup> Hemisphere GNSS proprietary

## Authorized Distributor:

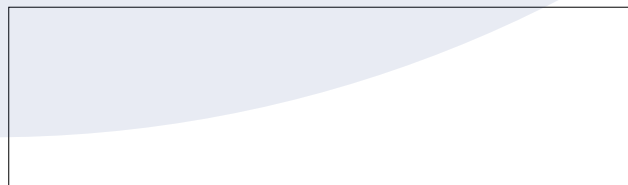

Copyright Hemisphere GNSS, Inc. All rights reserved. Specifications subject to change without notice.

Hemisphere GNSS, aRTK, Athena, Atlas, BaseLink, Crescent, Eclipse, SmartLink, SureFix, Tracer, and Vector are trademarks of Hemisphere GNSS, Inc.

Rev. 03/19



Hemisphere GNSS, Inc.  
8515 E. Anderson Drive  
Scottsdale, AZ, USA 85255

Toll-Free: +1 (855) 203-1770  
Phone: +1 (480) 348-6380  
Fax: +1 (480) 270-5070  
Precision@HGNSS.com  
www.HGNSS.com