
ML-3S & ML-3L MAGNETIC LOCATORS

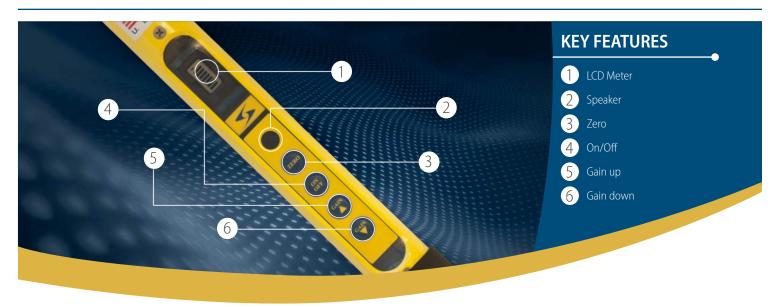

FEATURES

- ▷ Detection of ferrous metal objects, including property pins and markers, live wires, weapons, devices and other objects.
- ▶ IP68 Certified. Waterproof tested to water depths up to 250 ft. (76 m) and a complete protection against dust, dirt, and sand.
- ➤ Easy to use one handed operation with four button keypad:
 - ▶ On/Off button: Turns unit on or off.
 - Zero button: Automatically calibrates unit to ambient magnetic conditions.
 - ▶ Gain Up button: Increases the locating sensitivity of the unit.
 - ▶ Gain Down button: Decreases the locating sensitivity of the unit.
 - ▶ Includes soft case with carrying straps and inside pocket for batteries and manual
- ▶ Rugged construction suitable for field conditions
- Varying pitch audio signal mode using a moving coil speaker for enhanced audio output.
- ▶ Low battery indicator with flashing LCD.
- ▶ With a choice of 2 lengths (40" or 55"), it will fulfill any technician's needs.
- ▶ Detection of buried ferrous metal objects at depths up to 10′.
 - ⊳ Handgun: 1' to 2'
 - ▶ 175mm projectile: 4' to 5'
 - Water Shutoff valve: 6' to 10'
- ▶ Underwater Search and detection of:
- ▶ UXOs and Mines
- → Salvageable Wrecks
- ▶ Pipes and Cables
- > Optional aluminum hard case available
- → 7 year warranty.

SPECIFICATIONS

- ▶ Overall length: Short version- 40" (101.6cm) Long version- 55" (139.7cm)
- ▶ **Weight:** short version- 1.8lbs.(0.8kg); long version- 2.5lbs(1.13kg) including batteries.
- ▶ IP68 Certified. Waterproof tested to water depths up to 250 ft. (76 m) and a complete protection against dust, dirt, and sand.
- ▶ **Audio**: Speaker pitch increases in frequency proportional to field intensity.
- ▶ **Visual:** LCD display with bar graph indicating polarity and relative strength of signal. When lights are flashing it also indicates low battery.
- Input Power: Three standard 9-volt alkaline batteries.
- ▶ Battery Life: Under normal operation, approximately ±40 hours.
- ▶ **Operation Temperatures:** -13° to 140° F (-25° to 60° C)
- Construction: Exterior Sensor Tube made of aircraft grade aluminum.
- ▶ **MADE IN USA.** Built and serviced entirely in Wisconsin.







ML-1 & ML-1M MAGNETIC LOCATORS



FEATURES

- Detection of ferrous metal objects, including property pins and markers, live wires, weapons, devices and other objects.
- ▶ Easy and simple, one handed operation 3 keypad switches:
 - ▶ On/Off button: Turns unit on or off.
 - ▶ Gain Up button: Increases the locating sensitivity of the unit.
 - ▶ Gain Down button: Decreases the locating sensitivity of the unit.
- ▶ Strong aluminum "MonoTube" construction from the tip through the end of the handle. The ABS injection molded electronics compartment provides the best structural integrity in a hand-held locator.
- ▶ Lightweight just over 2 pounds, including batteries.
- ▶ Volume built into the on/off key: just hold down the key while it cycles through settings.
- ➤ Microprocessor remembers the volume and gain settings from the last time the unit was on.
- Battery compartment separated from electronic components and circuit board.
 - ▶ No exposing electronics to replace the batteries.
- Non-metered (ML-1), and Metered (ML-1M) versions designed to look, feel, and operate exactly the same.
- ➤ The metered version (ML-1M) adds features without complexity. No learning curve between units.
- ▶ Detection of buried ferrous metal objects at depths up to 10′.
 - ⊳ Handgun: 1'to 2'
 - ▶ 175mm projectile: 4' to 5'
 - ▶ Water Shutoff valve: 6' to 10'
- ▶ Soft-pack carrying case included. Hard case optional.
- ➤ Over 5000 ML-1M units in Afghanistan used for detection of improvised explosive devises (IEDs) and Unexploded Ordnances (UXOs).
- → 7 year warranty.

SPECIFICATIONS

- ➤ Overall length: Aluminum tube is 39" (98.4cm). The electronics compartment is 3.25" (8.25cm) tapered to 2.5" (6.4cm) wide x 4.5" (10.15cm) deep tapered to 2.5" (6.4cm).
- ▶ **Weight**: 2lbs.(0.9kg) including batteries.
- ▶ **Battery Life:** Under normal operation, approximately ±30 hours.
- ▶ **Input Power:** Two standard 9-volt alkaline batteries in custom molded bottom compartment.
- ▶ **Function:** Electronic keypad that clicks when a key is depressed.
- ➤ **Audio**: A real speaker is in the front panel providing outstanding volume. The speaker pitch increases in frequency proportional to field intensity.
- ▶ Visual: ML-1M model has LCD display with bar graph indicating relative strength of signal and polarity. Flashing battery symbol indicates low battery.
- **▷** Construction:
 - ▶ Exterior Sensor Tube made of aircraft grade aluminum.
 - ▶ Electronic Compartment made of ABS injection molded plastic.
- ▶ **MADE IN USA.** Built and serviced entirely in Wisconsin.





